

## EDA NSK 2309E\* NU 2309E\* NJ 2309E\* NUP bearing



EDA NSK 2309E\* NU 2309E\* NJ 2309E\* NUP bearing

### Cylindrical Roller Bearing: 2300 Series

NU, NJ and NUP



| Bearing Number | Available Styles | Boundary Dimensions |                 |                |                  |                   |                  |
|----------------|------------------|---------------------|-----------------|----------------|------------------|-------------------|------------------|
|                |                  | d                   | D               | B              | r <sub>min</sub> | r <sub>1min</sub> | F <sub>w</sub>   |
| 2309E*         | NU NJ NUP        | 45<br>(1.7717)      | 100<br>(3.9370) | 36<br>(1.4173) | 1.5<br>(0.0591)  | 1.5<br>(0.0591)   | 58.5<br>(2.3031) |

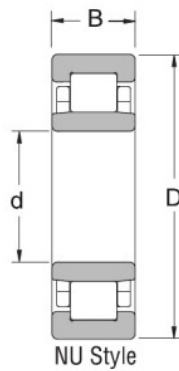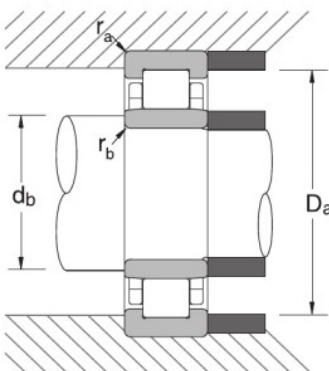

| Common Options |  |
|----------------|--|
| M              | Machined Brass Cage                    |
| W              | Pressed Steel Cage                     |
| ET             | High Capacity Polyamide Cage           |
| CO*            | Normal Internal Clearance              |
| C3             | Greater than Normal Internal Clearance |
| E              | Electric Motor Quality                 |

\*Not shown in part number

| Bearing Number | Basic Load Ratings |                   | Limiting Speeds (RPM) |         | Abutment and Fillet Dimensions |                      |                      |                      |                      |                         |                         | Bearing Weight (Approx.) |
|----------------|--------------------|-------------------|-----------------------|---------|--------------------------------|----------------------|----------------------|----------------------|----------------------|-------------------------|-------------------------|--------------------------|
|                | C <sub>r</sub>     | C <sub>0r</sub>   |                       |         | d <sub>b</sub> (min)           | d <sub>b</sub> (max) | d <sub>c</sub> (min) | d <sub>d</sub> (min) | D <sub>s</sub> (max) | r <sub>a</sub> ** (max) | r <sub>b</sub> ** (max) |                          |
|                | N (lbs)            | N (lbs)           | mm (in)               | mm (in) | mm (in)                        | mm (in)              | mm (in)              | mm (in)              | mm (in)              | mm (in)                 | kg (lbs)                |                          |
| 2309E*         | 158000<br>(35500)  | 153000<br>(34500) | 5300                  | 6700    | 53.0<br>(2.087)                | 56<br>(2.205)        | 60<br>(2.362)        | 66<br>(2.598)        | 92.0<br>(3.622)      | 1.5<br>(0.059)          | 1.5<br>(0.059)          | 1.28<br>(2.82)           |

Cylindrical Roller EDA NSK 2309E\* NU 2309E\* NJ 2309E\* NUP bearing



FAG轴承



NSK轴承



TIMKEN轴承



IKO轴承



INA轴承



NTN轴承



THK轴承



NACHI轴承



KOYO轴承



ZWZ轴承

price |specifications| SPEC| sale| size| Weight| draw | Manufacturer ,supplier,distributor,in stock, dimensions |China /Chinese Cylindrical Roller EDA NSK 2309E\* NU 2309E\* NJ 2309E\* NUP bearing  
Cylindrical Roller EDA NSK 2309E\* NU 2309E\* NJ 2309E\* NUP bearing skf FAG IKO NTN NACHI TIMKEN KOYO